

29 gauge XT-40S Colors

White

SRI 82

Parchment

SRI 72

Light Stone

SRI 62

Ivory

SRI 77

Hickory

SRI 54

Gray

SRI 47

Charcoal

SRI 29

Burgundy




SRI 26

Brick Red

SRI 38

Dark Red

SRI 37

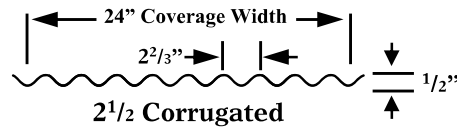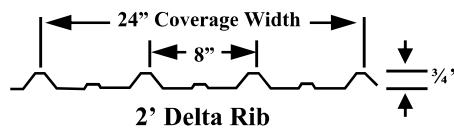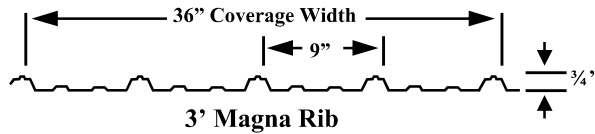

**TRY OUR ONLINE COLOR ASSISTANT AT
WWW.METALLIONINDUSTRIES.COM**

Colors listed above are intended to be close representations.
Actual color chips are available upon request.
Please verify color, gauge, and profile availability. See back page for details.
Contact us for other color choices and their associated lead-times.

SRI 42

Slate Blue

SRI 34

Dark Blue

SRI 41

Sage Green

SRI 29

Forest Green

SRI 29

Hunter Green

SRI 35

Coco Brown

SRI 29

Dark Brown

SRI 30


Weathered Copper

NO SRI

Black

SRI 50

Copper Penny



	<i>Delta Rib / Corrugated</i>	<i>Magna Rib</i>
Black	◇	◆
Brick Red	◇	◆
Burgundy	◇	◆
Charcoal	◆	◆
Coco Brown	◆	◆
Copper Penny	◇	◆
Dark Blue	◆	◆
Dark Brown	◆	◆
Dark Red	◆	◆
Forest Green	◆	◆
Galvalume	◆	◆
Gray	◆	◆
Hickory	◇	◆
Hunter Green	◆	◆
Ivory	◇	◆
Light Stone	◆	◆
Parchment	◆	◆
Sage Green	◇	◆
Slate Blue	◇	◆
Weathered Copper	◇	◆
White	◆	◆

QUALITY MAKES A DIFFERENCE

We are dedicated to providing the highest quality material. All of our steel is subject to strict quality control which means that our customers can depend on their investment for years.




- 40 year warranty on paint film integrity
- Reflects a minimum of 25% of the sun's rays
- Superior resistance to chalking and fading
- Creates cooler interiors (1% of reflected sunlight translates into a 1° reduction in heat allowed into the structure)
- Easy installation in the heat of the day
- Helps to prevent oil canning
- Rebates may be available from the Federal government or local energy companies

◆ stock colors ◇ available with additional cost and lead time



Steel and paint sources may vary, but all warrantied material utilizes cool paint technology.

1. ASTM A792/A792M-08, Grade "E" 80,000 psi steel.
2. Zinc/Aluminum or G60 Zinc coating
Clear resin coating added on all bare products.
3. Pre-treated film provides superior adhesion of the primer.
4. Urethane primer provides additional corrosion protection as well as ensuring permanent bonding of the finish coat.
5. Siliconized polyester finish coat adds fade-resistant color and long-lasting protection.

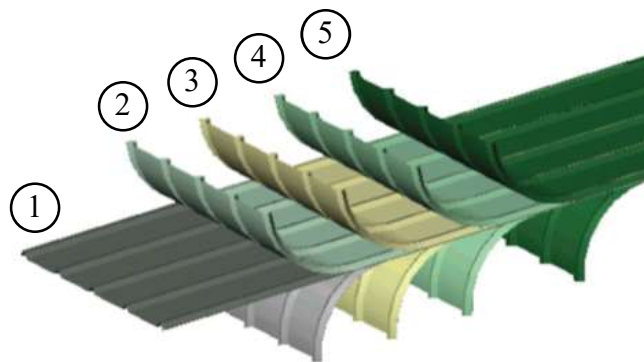

**Trapped moisture in the stacks of painted material may cause delamination of the painted surface or hasten deterioration of the painted finish. If panels arrive wet or become wet at the jobsite, open the bundle and allow them to dry completely.*