


**Metal Roofing,
Siding & Building
Accessories**



**Residential
Agricultural
Commercial**




White



Parchment



Light Stone



Ivory



Hickory



Gray



Charcoal








Burgundy



Brick Red



Dark Red

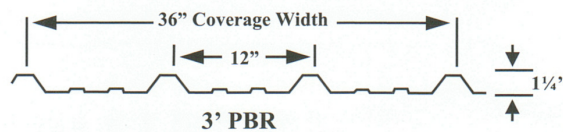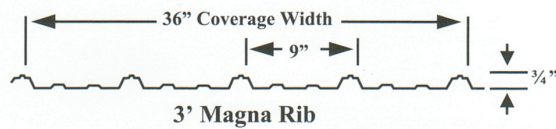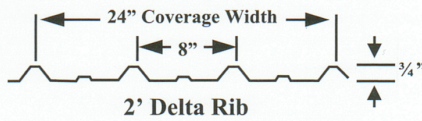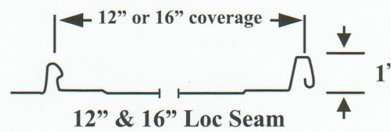

Slate Blue



Dark Blue



Sage Green



Forest Green



Hunter Green



Coco Brown



Dark Brown



Weathered Copper



Black



Copper Penny

Colors listed above are intended to be close representations. Actual color chips are available upon request. Please verify color, gauge, and profile availability. See back page for details. Contact us for other color variations and their associated lead times.

	Delta-Rib 2-1/2 Corr. 29 ga.	Magna Rib 29 ga.	PBR 26 ga.	16 Loc Seam 26 ga.	12 Loc Seam 26 ga.
White	*	*	*	*	
Parchment	*	*	*		
Light Stone	*	*	*		
Ivory		*			
Hickory		*	*		*
Gray	*	*	*	*	
Charcoal	*	*		*	
Burgundy		*			
Brick Red		*		*	
Dark Red	*		*		
Slate Blue		*		*	
Dark Blue	*	*			*
Sage Green		*	*	*	
Forest Green	*	*	*	*	*
Hunter Green	*	*	*	*	*
Coco Brown	*	*			*
Dark Brown	*	*		*	*
Weathered Copper		*	*	*	
Black		*			
Copper Penny		*		*	
Galvalume	*	*	*		

QUALITY MAKES A DIFFERENCE

We are dedicated to providing the highest quality material. All of our steel is subject to strict quality control which means that our customers can depend on their investment for years.

CoolPaint
TECHNOLOGY™


- 40 year warranty on paint film integrity
- Reflects a minimum of 25% of the sun's rays
- Superior resistance to chalking, fading, and environmental weathering
- Creates cooler interiors (1% of reflected sunlight translates into a 1° reduction in heat allowed into the structure)
- Easy installation in the heat of the day
- Helps to prevent oil canning
- Rebates may be available from the Federal government or local energy companies



Steel suppliers and paint sources may vary, but all warranted material qualifies as Energy Star.

1. ASTM A792/A792M-08, Grade "E" 80,000 psi steel.
2. Zinc/aluminum or G60 Zinc coating.
Clear resin coating added on all bare products.
3. Pre-treated film provides superior adhesion of the primer.
4. Urethane primer provides additional corrosion protection as well as ensuring permanent bonding of the finish coat.
5. Siliconized polyester finish coat adds fade-resistant color and long-lasting protection.

** Trapped moisture in the stacks of painted material may cause delamination of the painted surface or hasten deterioration of the painted finish. If panels arrive wet or become wet at the jobsite, open the bundle and allow them to dry completely.*

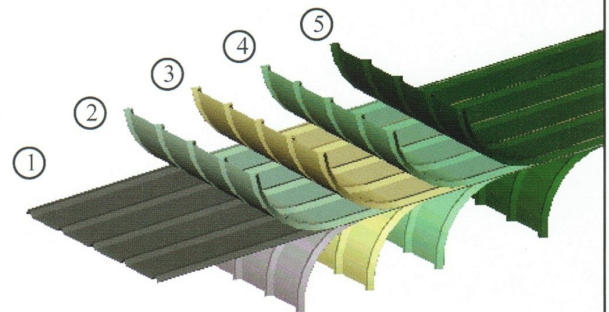

850 NW Park Avenue
Estacada, OR 97023
Website: www.metallionindustries.com



**METALLION
INDUSTRIES**

"Live Every Day For Jesus"

Phone: 503-630-7740
Fax: 503-630-7770
Email: metallion.ind@hotmail.com