

PLYCO

CORPORATION
PO BOX Q • ELKHART LAKE, WI 53020

SERIES 99E INSULATED UTILITY DOORS

SERIES 99E
INSULATED UTILITY DOORS

- *Low Maintenance*
- *Economy*
- *Roll Edge*
- *Easy Installation*
- *Energy Saving*
- *Durable and Attractive*



Light Kits and Lock Sets Sold Separately on all Series 99 Doors.

PLYCO Series 99E Utility Door

The Plyco 99 Series pre-hung door is one of our most popular doors with years of top engineering and customer satisfaction.

We have incorporated:

- Full perimeter weather stripping
- Universal swing feature, and is fully reversible in the 3 1/2" thick jamb
- Polyurethane Foam Core which reduces sound and possesses superior insulating qualities, 13 R-factor



**Shown with aluminum door skin option*

- Variety of locksets available (optional)
- Special back-set extrusion assures added strength for mounted hinge
- Full perimeter weather stripping. Special sweep available for use with in-swinging applications
- Optional all-white painted frame improves appearance
- New rolled edge construction
- No wood used inside
- Patented closer blocking

Windows:

- Variety of Lite Kits available (optional)





- Available in 3 options:
- Standard Jamb
 - Slide-In J-Trim
 - Slide-In Nailing Flange

Heavy duty 4 x 4 Steel, zinc plated hinges, prevent warping and assures smooth positive operations.

Weather Fin helps keep bad weather outside and good air inside

PLYCO
EVERLAST™
DOOR SYSTEMS

Slide-In J-Trim makes installation a breeze (optional)

Two-fin and bulb top and bottom weather seals contact header and threshold to greatly reduce water infiltration



Flush Latch Plate

New Rolled Edge Panel



PLYCO CORPORATION
USA
800/558-5895
FAX: 800/257-5926
INTERNATIONAL
920/876-3611
FAX: 920/876-3527
www.plyco.com

PLYCO Series 99E Door

SIZES 2/4 x 6/8 2/6 x 6/8 2/8 x 6/8 3/0 x 6/8 3/6 x 6/8 4/0 x 6/8 Dbl. 6/0 x 6/8 Dbl. 8/0 x 6/8
3/0 x 7/0 3/6 x 7/0 4/0 x 7/0 Dbl. 6/0 x 7/0 Dbl. 8/0 x 7/0

OVERALL DIMENSIONS Special sizes are available in picture pane style panels
a) For correct out to out dimensions see Data Sheet DO-3
b) For Rough Opening dimensions, use dimensions (above - a) and add 1/2" to width and 3/8" to height.

MULLION / ASTRAGAL Double doors have attached astragal on the inactive panel of the pair - shipped knocked- down. Hinges are attached to jambs. Manual head and foot bolt concealed in the astragal

HINGES (3) 4" x 4" zinc plated loose pin hinges are standard, SS/NRP available as an option

THRESHOLD Aluminum, universal

DOOR PANEL

THICKNESS 1 3/4"

SKIN Smooth 26 ga. galvanized steel painted finish Polar White or Chocolate Brown. Polar Aluminum optional

EDGES Rolled edge in aluminum core rails

BLOCKING HDPE lock reinforcing structure, optional patented heavy duty aluminum closer blocking
Special lock blocking is available

INSULATION Panel R-13 (u= .077)

EMBOSSING 3/0 x 6/8 only - Six panel style

COLORS Polar White only finish paint.

LOCK FACE PREP Standard with 2 1/8" lockset bore, 2 3/4" backset. Non-bored is optional

DEAD BOLT Optional face bore and edge prep for deadbolt, latchguard available as an option

SWEEP Durable Acryn bulb & fin sweep

LITE KITS 1-LI-2 20" x 24" Insulated 1-LA-2 20" x 24" Single glazed
1-LE-2 16" x 16" Insulated 1-LB-2 22" x 36" Insulated
1-LU-2 4" x 48" Single glazed 9-LB-2 22" x 36" Insulated with 9-Lite internal grids
Other glass sized available - lite kits listed above are most common

JAMB

TYPE PREHUNG

MATERIAL Aluminum (Available in White & Mill Finish Jambs)

FEATURES Flush plain doors are universal swing
Heavy pile weatherstrip


FRAME DEPTHS 3 1/2" only

ANCHORS Standard frame screws
optional nailing fin for in-swing or out-swing

HINGE PREPS Face mounted with concealed edge

TESTING

PENDING

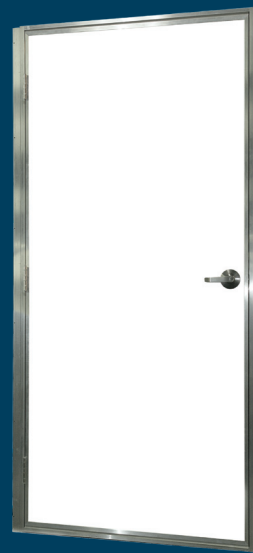

SPECIAL SIZES
are available in
framed edge style
Series 99 Door
models.

Thickness - 1 5/8"

Call for out to out
dimensions for
special sizes.

* Steel, Aluminum and Fiberglass available

Because of its ongoing commitment to product improvement, Plyco Corporation reserves the right to change, without notice, product specifications, availability, prices and conditions of sale.

PLYCO
CORPORATION
PO BOX Q • ELKHART LAKE, WI 53020

www.plyco.com 800/558-5895 FAX: 800/257-5926
INTERNATIONAL 920/876-3611 FAX: 920/876-3527

WINDOWS • WALK DOORS • WALL VENTS • RIDGE VENTS
SLIDING DOOR TRACK • SLIDE DOOR RAILS • PLY-FOIL INSULATION
HORSE STALLS • FASTENERS & CLOSURES • SPECIALTY PRODUCTS