

RESIDENTIAL • COMMERCIAL • AGRICULTURAL

PRODUCT CATALOG







ROOFING • SIDING • ACCESSORIES





ROOF & WALL CLADDING	Panel Guide	1
	Exposed Fastener Panels	2-5
	Concealed Fastener Panels	6-8
	Mechanically Seamed Panels	9
	Metal Shingles	10-11
	Steel Siding	12
TRIM	Standard Trim & Flashing	13
	PBR Trim & Flashing	14
	Loc-Seam Trim / Chimney & Skylight Flashing	15
	Soffit & Fascia Trim	16
	MI-150 Trim	17
	MI-200 / MI-210 Trim	18
	Clip-Loc Trim	19
	Steel Siding Trim	20
DOORS	Entry Doors	21-22
	Arcadian Dutch Doors	22
	Sliding Door Hardware	23
	Overhead Doors	24-25
FASTENERS	Wood Fasteners	26
	Self-Drilling Fasteners & Rivets	27-29
	Concrete Anchors / Frame Bolt Assemblies	30
INSULATION & UNDERLAYMENT	Underlayment	31
	Insulation / Vapor Barrier	32
SEALANTS & CLOSURE	Adhesives & Sealants	33-34
	Pipe Flashings	35-36
	Venting & Closure Foam	36-37
TOOLS	Cutting, Folding & Crimping Tools	38-41
	Caulk Guns	41
	Saw Blades	42
	Drill Bits	43-44
	Measuring Tools & Safety	44-45
	Miscellaneous Items & Rental Equipment	45-46
BUILDING ACCESSORIES & LIGHT PANELS	Polycarbonate Panels / Fiberglass Panels	47
	Cupolas / Weathervanes	48
	Horse Stall Components	49

Issued 2016

"Live Every Day for Jesus!"



Office: (503) 630 - 7740

METALLION INDUSTRIES PANEL PRODUCTS GAUGE COVERAGE APPLICATION COLORS Traditional Metal Roof & Wall Panels (Exposed Fasteners) 29 / 26^{*} 36" **MAGNA-RIB ROOF & WALL PAINTED & GALV** 26 / 24* 36" **ROOF & WALL** PAINTED & GALV **PBR** 29 24" **ROOF & WALL PAINTED & GALV DELTA-RIB** 24" (21" roof) **CORRUGATED** 29 **ROOF & WALL** PAINTED & GALV Residential & Commercial Roof Panels (Concealed Fasteners)** 26 / 24^{*} 12" / 16" **LOC-SEAM ROOF PAINTED** 26^{*}/24 17%" (13%" 26ga.) ROOF **CLIP-LOC PAINTED** 16" / 18" 24 **ROOF PAINTED MECHANICAL SEAM** Seamless Metal Soffit & Siding Panels (Concealed Fasteners)** **FLUSH PANEL** 24 12" **SOFFIT & WALL PAINTED** 26 / 24^{*} WALL **BOARD & BATT** 11¾" **PAINTED** 26 / 24* **STANDARD LAP** 11¾" WALL **PAINTED** 26 / 24^{*} 11¾" WALL **PAINTED DUTCH LAP**

Non-Standard Gauge – See Sales Agent for Details Full Length Panels can be Manufactured at your Jobsite - See Sales Agent for Details and Limitations

Fax: (503) 630 - 7770


Our flagship product line: Metallion Industries' roll-formed steel roofing and siding panels are engineered and manufactured to provide your structure with superior protection against the elements, resulting in long-lasting beauty and performance.

All of our premium panel lines utilize only high-quality steel and coatings, with each panel visually inspected at the time of manufacturing to ensure that you receive only the best. See our website below for our paint warranty information and more.

Please contact our friendly and knowledgeable staff today to discuss how we can enhance your next building project!

www.metallionindustries.com



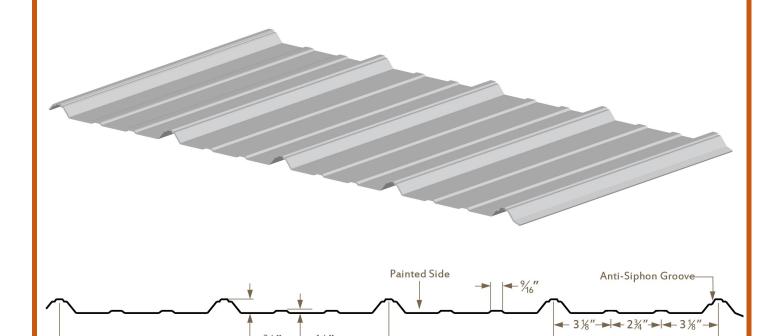

MAGNA RIB

Magna Rib is our most popular panel due to its versatility, economic value, and unique design. Reinforced major ribs not only strengthen the panel but improve panel alignment during installation. This 36" panel is most often used on pole barns, sheds, and other light industrial buildings.


36" Coverage


AT A GLANCE



- Full 36" net coverage
- Purlin-bearing edge for strength and speed while fastening side laps
- Anti-siphoning side lap
- 8 intermediate stiffening ribs add extra strength to this panel
- Custom lengths 1' through 50' in cut-to-length one inch increments
- For color availability, additional specifications, and other information, please contact us or visit our website: www.metallionindustries.com



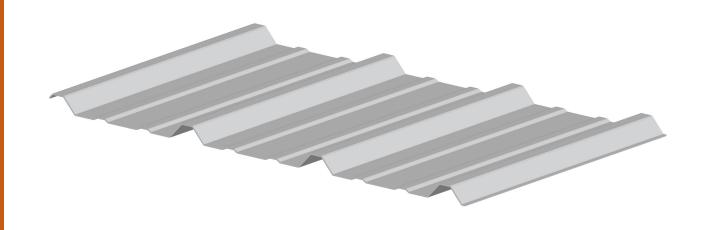

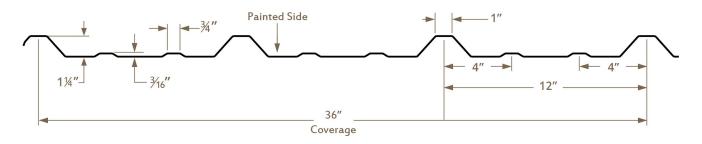

PBR

The PBR profile excels in commercial and industrial applications. Our PBR is made with heavy gauge steel – allowing panels to span up to five feet on purlins. The tall ribs not only increase load bearing capabilities, but deter water from siphoning under the overlap rib, making PBR ideal for low-sloped commercial roofs.


AT A GLANCE




Office: (503) 630 - 7740

- Full 36" net coverage
- Excellent for commercial and industrial applications
- 26 gauge full hard (80 ksi) steel
- PBR panels require a minimum slope of ½:12
- UL90 rating when attached to steel purlins
- Custom lengths 1' through 50' in cut-to-length one inch increments
- For color availability, additional specifications, and other information, please contact us or visit our website: www.metallionindustries.com




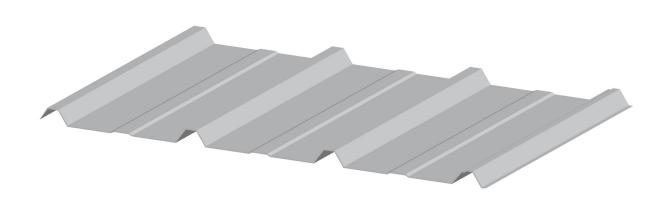

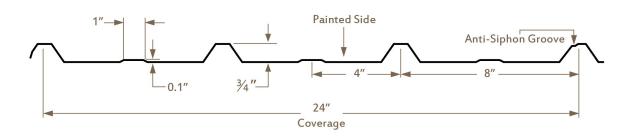

DELTA RIB


Delta Rib is an exposed fastener panel that is designed to carry heavier loads; perfect for the job that requires more strength. These narrow panels are more accommodating for steep-sloped roof installations or one man crews.




AT A GLANCE

- Full 24" net coverage
- Through fastened panel for roofing or siding
- Purlin-bearing edge for strength and speed while fastening side laps
- Anti-siphoning side lap
- Custom lengths 1' through 50' in cut-to-length oneinch increments
- For color availability, additional specifications, and other information, please contact us or visit our website: www.metallionindustries.com



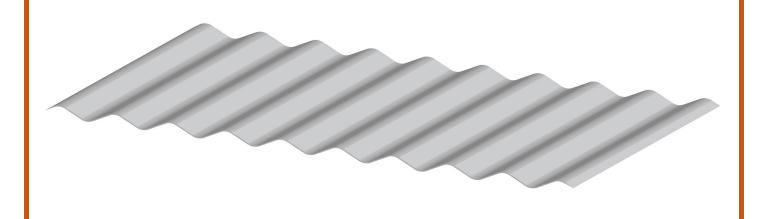

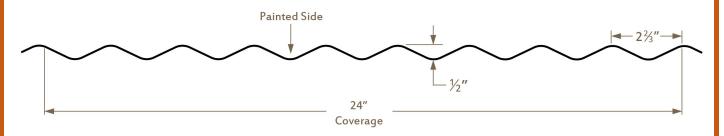

CORRUGATED

The history of corrugated metal panels reaches back almost 200 years ago and, having survived the test of time, they still are in demand today – especially for those wanting to maintain a rustic, traditional appearance. Our 2 ½" Corrugated panels are only 26" wide, making them more accommodating for one-man crews.




AT A GLANCE

- Full 24" net coverage for siding applications
- 21" net coverage for roofs
- Through fastened panel for roofing or siding
- Custom lengths 2' through 50' in one inch increments
- Traditional style looks great in agricultural, light industrial or residential applications
- For color availability, additional specifications, and other information, please contact us or visit our website: www.metallionindustries.com

Office: (503) 630 - 7740 Fax: (503) 630 - 7770 www.metallionindustries.com



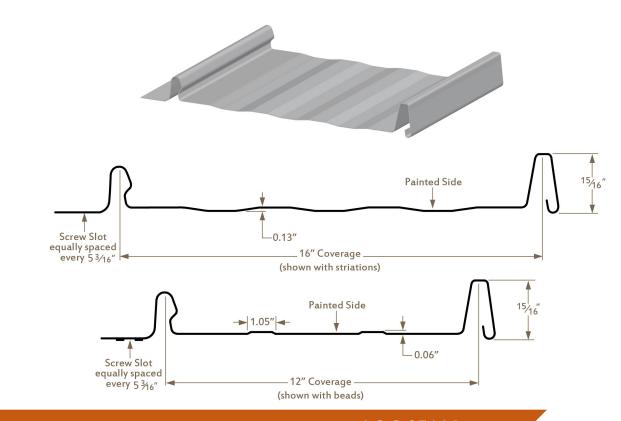

LOC SEAM


Loc Seam is especially popular with insulated buildings because concealing the fasteners greatly reduces the chance that a failed washer will result in an expensive leak. A "concealed fastener" panel not only reduces maintenance concerns by protecting fasteners from the elements, but the smooth design allows debris from trees to wash or blow off the roof easier – reducing frequency of roof cleanings.

AT A GLANCE



- Full 12" or 16" net coverage
- Low maintenance and easy installation
- Residential / Commercial applications
- No exposed fasteners
- Installed over solid substrates with underlayment
- On-site roll forming to custom lengths available
- Direct fastened—no clips necessary
- Teflon® "non-stick" additive in our standard paint
- For color availability, additional specs, or other information, please contact us or visit our website



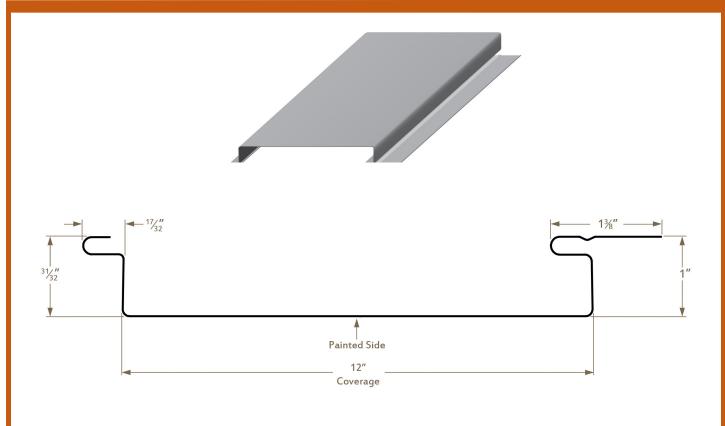

FLUSH PANEL

Flush Panel is a concealed fastener system for creating sleek, smooth walls, vented soffits, or simple and attractive fascia coverings. Our Flush Panel gives you an aesthetic option. Typically made using 24 gauge steel — you may rest assured that your Flush Panel application has the utmost durability.




AT A GLANCE

- Full 12" net coverage
- Attractive choice for wall, fascia, & soffit applications
- Can be installed vertically or horizontally
- Concealed fastening system
- Perforations available for vented soffit applications
- On-site roll forming to custom lengths available
- Adjustable reveal: from 0" to 3" in ½" increments
- Standard flat pan; available with beads or striations
- For color availability, additional specs, or other information, please contact us or visit our website

Office: (503) 630 - 7740 Fax: (503) 630 - 7770 www.metallionindustries.com



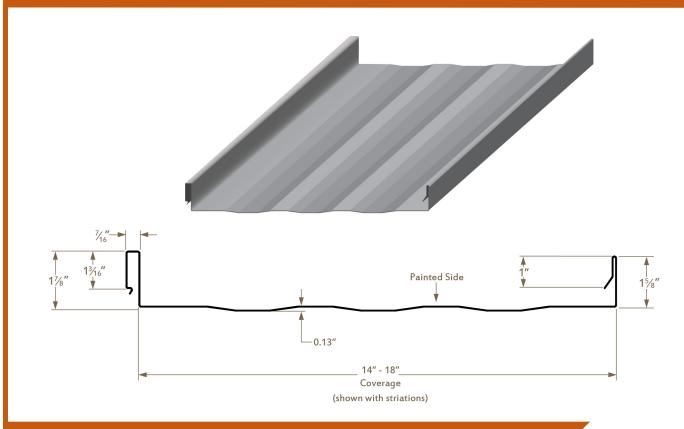


CLIP LOC

Clip Loc panel is a snap-together panel (no seaming required) designed for commercial, light structural or residential applications. The traditional flat-pan look is not only aesthetically pleasing but engineered to exceed most wind load requirements in the country.




AT A GLANCE

- 17 ¾" net coverages available (13 ¾" in 26 gauge)
- 24 gauge pre-painted G-90 standard (22 gauge optional)
- Bold 1 ¾" tall seam
- On-site roll forming to custom lengths available
- Special clip allows for full 2" of thermal movement
- Optional factory or field-applied side lap sealant
- Weathertight warranty option
- Can be applied over solid substrates, steel decking with polyiso, or in limited applications over open purlins
- For color/custom coil availability, additional specs, or other information, please contact us or visit our website

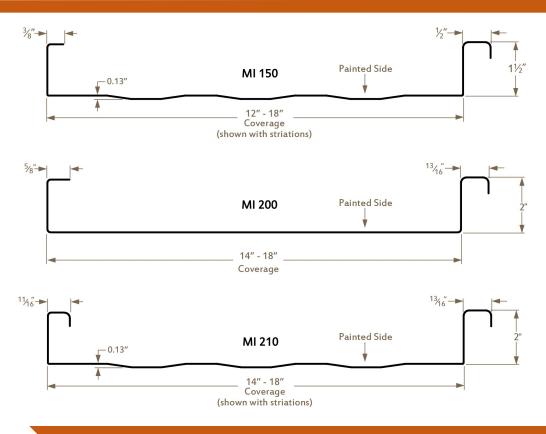

MECHANICAL SEAM

Our mechanically seamed panels, designed for architectural and commercial applications, are available in different configurations to accommodate a large variety of situations. The traditional flat-pan look is not only aesthetically pleasing but engineered to exceed most wind load requirements in the country.

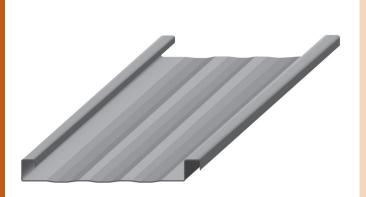

AT A GLANCE

- 16" or 18" net coverages standard
- 24 gauge pre-painted G-90 standard (22 gauge optional)
- On-site roll forming to custom lengths available
- Clip system allows for thermal expansion & contraction
- Single and Double seaming machines available for rent
- Optional factory or field-applied side lap sealant
- Weathertight warranty option
- Can be applied over solid substrates, steel decking with polyiso, or in limited applications over open purlins
- For color/custom coil availability, additional specs, or other information, please contact us or visit our website



- Stone coated steel shingle ("XD" gives heavy cut look)
- Non-combustible class A rated material
- Low maintenance—can be safely walked on
- Interlocking panels provide weathertight barrier
- Transferable 50 year limited warranty
- Please contact us for available options, accessories, and pricing

Description	Width	Length
Shingle	21"	52"
Shingle XD	14 1/8 "	52 ³ / ₈ "
Shake	14 5/8 "	53"
Tile	16 ½"	52"



DECRA

MET-TILE

- The beauty of tile without the weight
- Made of 26 gauge commercial steel
- Excellent energy saving and disaster performance
- Specifically designed to seal out wind and weather
- Comes with a 20 year warranty
- Please contact us for available options, accessories, and pricing

~~	~~~	~~	~~	~
~	~~~	~~	\sim	~
~~	~~~	~~	~~	~
~	~~~	~~	~~	~
Section 18 Section 18	~~~			
and the second				
		100		
	AAA	AA	AAA	A

Description	Width	Length	
Met-Tile	38 5/16"	2' - 20' (in 1' increments)	

- Galvanized steel substrate (28 or 30 gauge)
- Fluoropolymer PVDF finish (Kynar 500)
- Double embossed texture for extra strength
- Available in 22 designer colors
- Concealed fastening systems
- Unique embossed roll formed accessory package
- Limited lifetime warranty program
- Wind and fire ratings
- Please contact us for available options, accessories, and pricing

Description	Width	Length
Shingle Shake (30 ga.)	12"	50"
Shingle Shake (Enhanced)	12"	50"
Slate (28 ga.)	12"	50"
Slate (Enhanced)	12"	50"



ARROWLINE



Shingle Shake Panel

50" x 12" - 12 pcs / ctn 50 sq ft coverage



Shingle Shake Ridge / Hip Cap

20 pcs / ctn









Slate Panel

50" x 12" - 12 pcs / ctn 50 sq ft coverage



Slate

Ridge / Hip Cap



ARROWLINE ACCESSORIES

Eave Starter

10' Long



% " J Trim

10' Long



Open Valley Flashing

10' Long



Valley Flashing

10' Long



Valley Cap

10' Long



End Wall Flashing



Rake Starter

10' Long



Shingle / Valley Clip

750 / ctn .020" G90



Trimline Vent

10' Long



Starter Base


10' Long Vented Non-Vented (w/Foam)

Available Colors					
	Bright Red	Hartford Green			
	Cedar	Pewter			
	Charcoal Gray	Royal Brown			
Character Charles	Classic Blue	Sandstone			
Shingle Shake	Classic Red	Spruce Green			
	Copper	Statuary Bronze			
	Desert Tone	T-Tone			
	Glacier White				
	Charcoal Blend	Royal Brown Blend			
Shingle Shake	Hartford Green Blend	T-Tone Blend			
-1 -	Charcoal Gray	Hartford Green			
Slate	Classic Red	Stone			
CI.	Charcoal Gray Blend	Stone Blend			
Slate	Classic Red Blend				

Office: (503) 630 - 7740

Description	PCS/CTN	Quantity			
Shingle Shake / Slate	12	50 sqft / ctn			
Eave Starter	10	100 lf			
Rake Starter	10	100 lf			
⅓″ J Trim	10	100 lf			
End Wall Flashing	5	50 lf			
Valley Flashing	5	50 If			
Valley Cap	5	50 If			
Trimline Vent	5	50 If			
Starter Base	5	50 If			
Starter Base w/Foam	5	50 If			
12" Ridge / Hip Cap	20	20 lf			
Shingle Shake Clip	100	120 / square			
Valley Clip	100	2 / If of valley			
All Accessories Are Velvet Embossed					




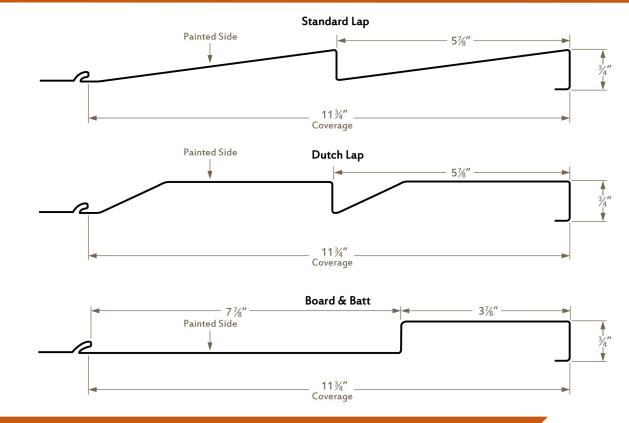

SEAMLESS SIDING


Designed with minimal maintenance and longevity in mind, our durable 26-gauge steel siding is a sound investment. Our siding conceals the fasteners, creating a sleek, clean appearance. No unsightly caulking, lapping, or painting patchwork required. On site roll-forming makes long, seamless panels a reality!

AT A GLANCE 11 %" net coverage 26ga steel is more durable than wood or vinyl Concealed fastener system (no screws showing) Embossing (wood pattern) available Will not crack in cold temperatures Seamless (no end-lap joints) Baked-on, long-life finishes and low maintenance ensures life-cycle cost savings over conventional siding materials.

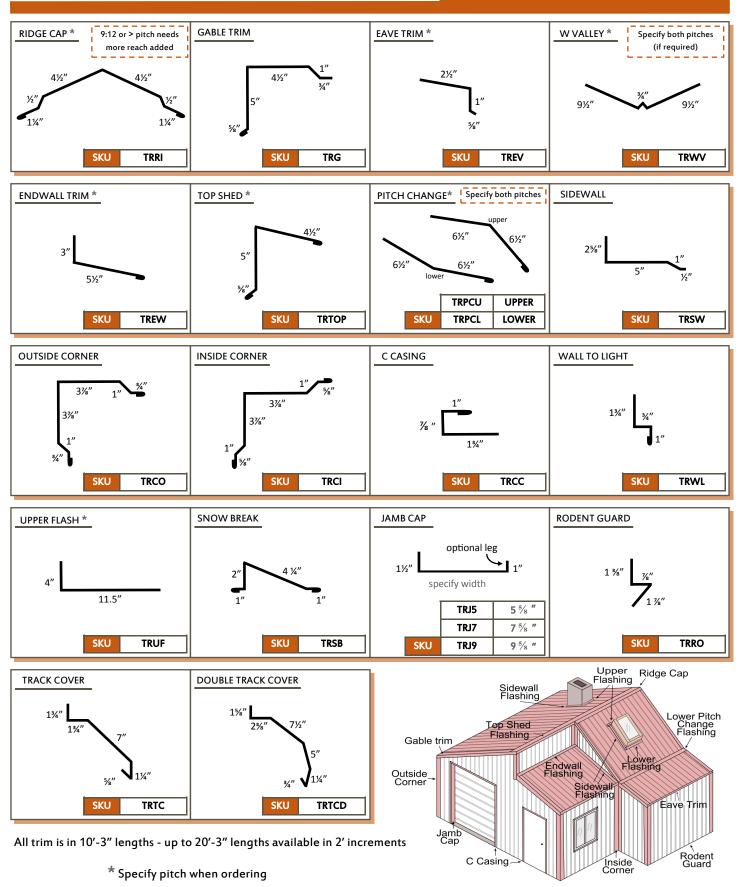


Office: (503) 630 - 7740



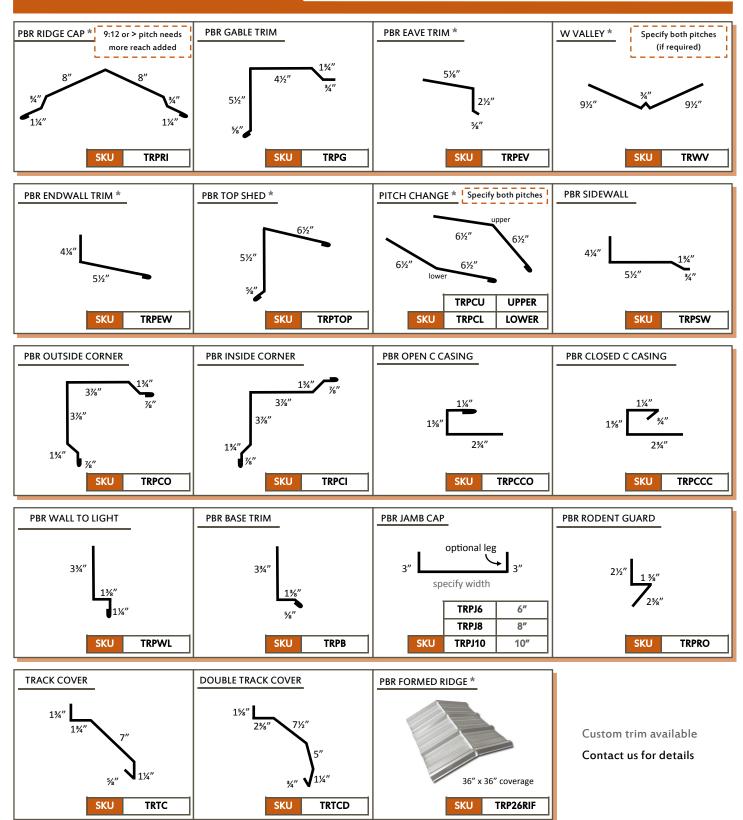


All trim is in 10'-3'' lengths - up to 20'-3'' lengths available in 2' increments

^{*} Specify pitch when ordering

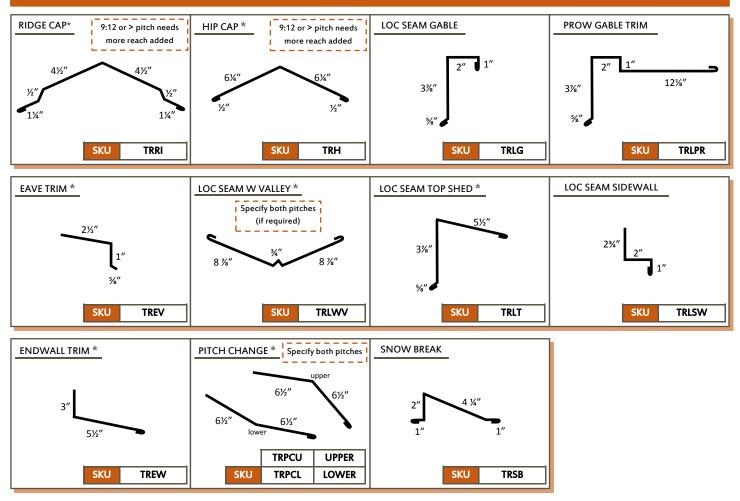

All trim is in 10'-3" lengths - up to 20'-3" lengths available in 2' increments

CHIMNEY & SKYLIGHT FLASHING

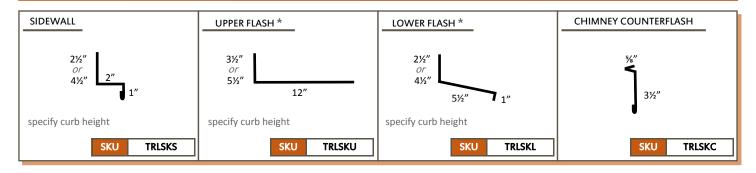

All trim is in 10'-3'' lengths - up to 20'-3'' lengths available in 2' increments

^{*} Specify pitch when ordering

^{*} Specify pitch when ordering





ALL LISTED DIMENSIONS TYPICAL


DIMENSIONS CUSTOMIZABLE UPON REQUEST


All trim is in 10'-3" lengths - up to 20'-3" lengths available in 2' increments


* Specify pitch when ordering




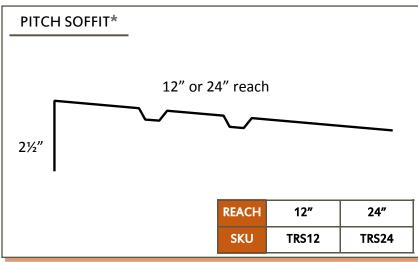



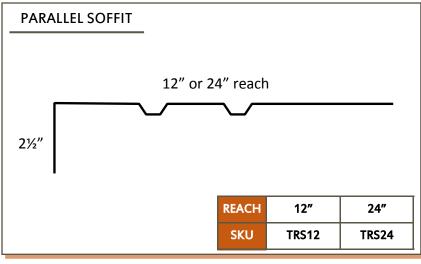




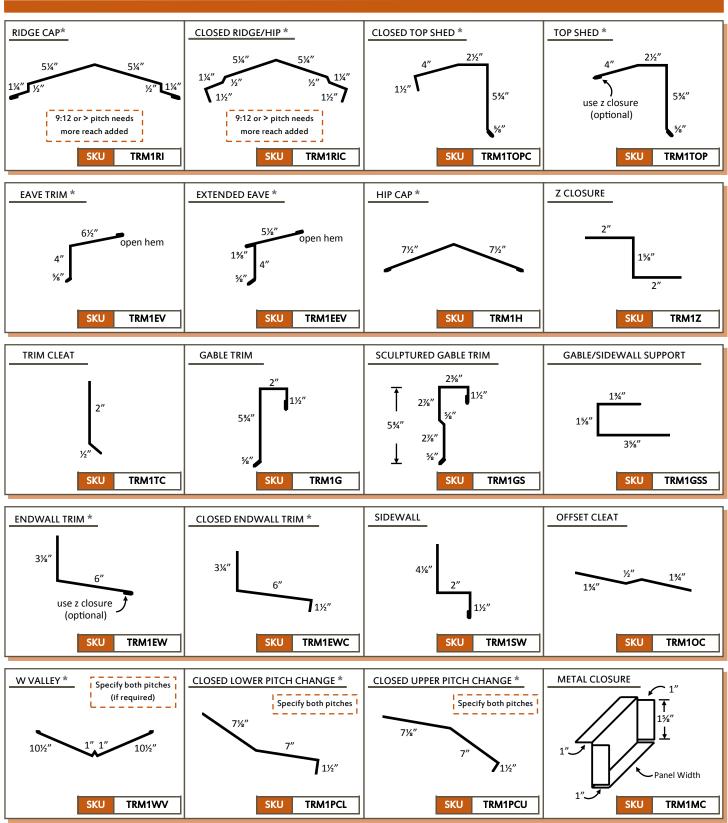

All trim is in 10'-3" lengths - up to 20'-3" lengths available in 2' increments


^{*} Specify pitch when ordering



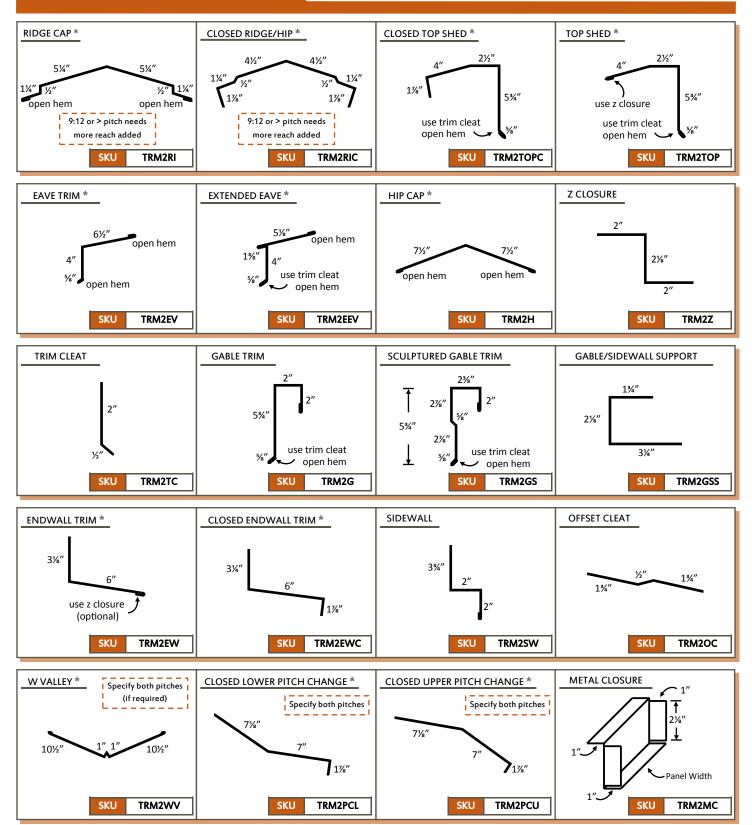

All trim is in 10'-3'' lengths - up to 20'-3'' lengths available in 2' increments


^{*} Specify pitch when ordering

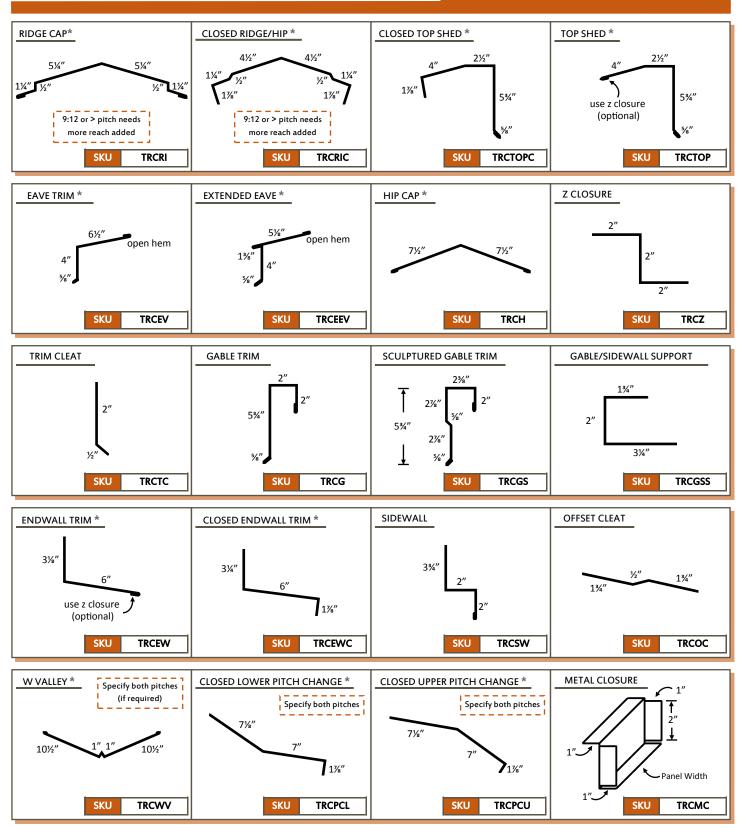



All trim is in 10'-3" lengths - up to 20'-3" lengths available in 2' increments


^{*} Specify pitch when ordering























Standard Length for Siding Trim: 12'-3"



- 24 gauge smooth steel panel, baked-on white enamel finish coat
- Pre-painted aluminum frame (white)
- 3 ½" Pre-hung 4-way universal swing jamb system
- Polyurethane foam core, R-value 12
- Full perimeter weather stripping, 3 stainless steel fixed pin hinges, and keyed lockset included
- Window options available

	Door		Rough Opening	
SKU	Width	Height	Width	Height
PDR9436	3'-0"	6′-8″	40 1⁄2"	82 ¼"
PDR9448	4'-0"	6′-8″	52 ½"	82 ¼"
PDR9472	6'-0"	6′-8″	77 ¾"	82 ¼"

SERIES 94

- Painted 16 gauge steel frame (polar white)
- 26 gauge smooth steel skin, baked-on polar white finish coat
- 3 ½" Pre-hung 4-way universal swing jamb system
- Polyurethane foam core, R-value 13
- Full perimeter weather stripping, 3 stainless steel fixed pin hinges,
 and keyed lockset included

	Door		Rough Opening	
SKU	Width	Height	Width	Height
PDR9536	3′-0″	6′-8″	38 ½ "	81 ¾"
PDR9548	4'-0"	6′-8″	50 ½ "	81 ¾"
PDR9572	6′-0″	6′-8″	75	81 ¾"

SERIES 95

21

ENTRY DOORS



- 26 gauge smooth steel skin, baked-on polar white finish coat
- High tensile aluminum frame
- 3 ½" Pre-hung 4-way universal swing jamb system
- Polyurethane foam core, R-value 13
- Full perimeter weather stripping, 3 stainless steel fixed pin hinges, and keyed lockset included
- Optional fixed pin hinges for extra security

	Door		Rough Opening	
SKU	Width	Height	Width	Height
PDR9936	3'-0"	6′-8″	38 ½"	82 ¼"
PDR9948	4'-0"	6′-8″	50 ½"	82 ¼"
PDR9972	6'-0"	6′-8″	75 ½"	82 ¼"



SERIES 99

ARCADIAN DUTCH DOORS

- Fabricated from 16 gauge Galvanneal
- Feature one-piece cut laser design
- Standard D-Latch
- 3-piece frame prepped with hinges

Assembled Premium Dutch & Bale doors include the following components:

- One piece laser cut door panels
- Cross bucks
- 29 gauge steel insert
- Plywood core
- Hinges
- Barrel bolt
- D-Latch
- Door Catch
- Fasteners

	Rough Opening		SKU	
Description	Width	Height	Standard	Windows
Dutch Door	49 1/8 "	87 1⁄2"	MWDDS	MWDDW
Bale Door	49 1/8 "	43 ¾"	MWBDS	MWBDW




DUTCH & BALE DOORS







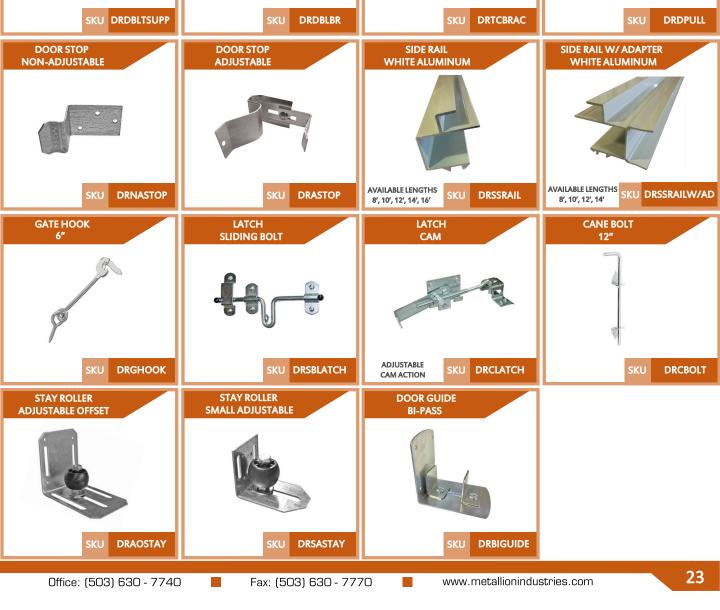

COMMERCIAL OVERHEAD DOORS



- C-2400 steel sectional door designed for moderate commercial use
- Nominal 24 gauge steel construction, 2" thick x 3" wide box-stiles
- Economical and trouble-free operation
- Standard white smooth finish
- Optional R 7.6 Insulated panels with polylaminate back available (30 gauge steel back option available)
- Hi-lift, vertical lift, and roof pitch track available
- ✓ Low headroom radius track available down to 7" clearance
- Additional options available, please contact us for additional information
- Manufactured by Wayne Dalton Made in USA



MODEL 2400

- C-24 steel sectional door, high strength for heavy-duty use
- True 24 gauge steel construction, 2" thick x 3" wide box-stiles
- Standard white smooth finish
- Optional R 7.6 Insulated panels with polylaminate back available (30 gauge steel back option available)
- Hi-lift, vertical lift, and roof pitch track available
- Low headroom radius track available down to 7" clearance
- Additional options available, please contact us for additional information
- Manufactured by Wayne Dalton Made in USA



MODEL 24 GAUGE



- Embossed, 25 gauge steel panels
- 15-year paint system standard
- Five factory-finished color options
- Tongue-and-groove section joints
- 2" thick frame construction
- Woodgrain textured; short and long raised panel designs available
- Wide variety of window options available
- Contact us regarding available sizing options

MODEL T50



- Embossed 25 gauge steel panels
- 15-year paint system standard
- Five factory-finished color options
- Tongue-and-groove section joints
- 2" thick frame construction
- Woodgrain textured
- Short and long raised panel designs available
- Wide variety of window options available
- ─ 1-5/16", R 6.3, polystyrene vinyl-backed insulation
- Contact us regarding available sizing options
- Manufactured by Clopay® Made in USA

MODEL T52 (Insulated)

Office: (503) 630 - 7740 Fax: (503) 630 - 7770 www.metallionindustries.com





- Sheet metal to sheet metal screw
- Used for side lap, ridge cap, and fastening various other trim pieces
- Control seal washer for a consistent, weather tight seal
- Weather coating for supreme corrosion resistance
- Stocked in plain (galvanized) and all of our standard paint colors

STITCHERS



- Control seal washer for a consistent, weather tight seal
- Weather coating for supreme corrosion resistance
- Stocked in plain (galvanized) and all of our standard paint colors (not every size in stock)



SKU	Diameter	Length	Quantity	Head Size
SC1	#9	1″	250	1⁄4" Hex
SC1.5	#9	1 ½"	250	1⁄4" Hex
SC2	#9	2"	250	1⁄4" Hex
SC2.5	#9	2 1/2"	250	1⁄4" Hex
SC3	#9	3"	250	1⁄4" Hex

ROOF & WALL



- Designed for areas where a low profile is essential
- Recommended for our concealed fastener panels
- Weather coating for supreme corrosion resistance

ULTRA	LOW	PROFILE	

SKU	Diameter	Length	Quantity	Head Size
SCULT1	#10	1"	250	#2 Square
SCULT1.5	#10	1 ½"	250	#2 Square



- Special washer designed for fixing polycarbonate skylight panels
- Weather coating for supreme corrosion resistance

PO	IVSEAL	(WOOD)
-	LIJLAL	$(VV \cup U \cup I)$

SKU	Diameter	Length	Quantity	Head Size
SCPOLY1	#9	1"	250	1⁄4" Hex
SCPOLY1.5	#9	1 ½"	250	1⁄4" Hex

26

SELF DRILLING FASTENERS



- Used for pan fixing steel panels on walls and roofs
- Has % outside diameter washer and rubber seal
- Weather coating for supreme corrosion resistance
- Stocked in plain (galvanized) and a variety of paint colors



SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
SDHB3121425	#12	14	1″	Т3	250	5⁄ ₁₆ ″ Hex
SDHB3121440	#12	14	1 ½"	Т3	250	5⁄ ₁₆ ″ Hex

ROOF & WALL (PAN FIXING)


- Used for crest fixing steel panels on the roof
- ── Has ⁹/₁₆" outside diameter washer and rubber seal
- Secondary thread under shank pulls metal upward preventing any water penetration
- Weather coating for supreme corrosion resistance
- Stocked in plain (galvanized) and a variety of paint colors

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
SDHKN4121445	#12	14	1 1/8 "	T3	250	5⁄ ₁₆ ″ Hex
SDHKN4121455	#12	14	2 3/8 "	T3	250	5∕16″ Hex
SDHKN4121468	#12	14	3 ¼"	Т3	To Order	5⁄ ₁₆ ″ Hex



ROOF (CREST FIXING)

- Stitching screw used for sheet to sheet fastening
- Ideal for bonding lap seams in light gauge panels
- Weather coating for supreme corrosion resistance
- Stocked in plain (galvanized) and a variety of paint colors





LAP SCREWS





- Used for fastening heavy duty structural framing
- Weather coating for supreme corrosion resistance

FRAMING (Heavy Duty)

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
SDH83142025	#14	14	1″	Т3	500	3/8 "Hex



- Used for fastening medium duty structural framing (doors & windows)
- Weather coating for supreme corrosion resistance

FRAMING (Medium Duty)

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
LDSF121434	#12	14	3⁄4″	T2	250	5⁄ ₁₆ ″ Hex



- Tek Series 5 Driller
- Used for drilling through thick or multiple layers of steel
- Ideal for double knee and apex bracing
- Weather coating for supreme corrosion resistance

FRAMING (T-5)

Office: (503) 630 - 7740

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
S5H3142432	#14	24	1 ½"	T5	50	3⁄8 "Hex

Fax: (503) 630 - 7770 www.metallionindustries.com

SELF DRILLING FASTENERS



- Designed for attaching wood to structural steel
- Special ribbed head seats itself flush into the wood for easy top finishing
- Ideal for putting sub flooring on steel mezzanines
- Weather coating for supreme corrosion resistance

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
WDCPH3101645	#10	16	1 ⁷ /16"	Т3	To Order	#2 Philips
WDCPH3101655	#10	16	2 1⁄4"	T3	To Order	#2 Philips
WDCPH3101675	#10	16	3″	T3	To Order	#2 Philips



WING DRILLER

- Designed for areas where a low profile is essential
- Recommended for attaching C-casing to allow panels to slide into the trim without hanging up on a traditional hex head
- Weather coating for supreme corrosion resistance
- Stocked in plain (galvanized)

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
SCPKD5/8	#10	16	5/8 "	T2	To Order	#2 Philips
SCPKD	#12	16	1"	T2	To Order	#2 Philips



PANCAKE HEAD

- Special washer designed for crest fixing polycarbonate skylight panels
- Weather coating for supreme corrosion resistance

SKU	Diameter	TPI	Length	Tip	Quantity	Head Size
SDHP3121445	#12	14	1 ¾"	T3	250	5∕ ₁₆ " Hex
SDHP3121455	#12	14	2 1⁄4"	Т3	250	5⁄₁6" Hex



POLYSEAL (STEEL)

- Provides a low visibility trim connection
- Suited for downspouts, gutters and corner trim
- Available in galvanized or a variety of colors

SKU	Size	Quantity
RDAS403	¹/8″x 5∕₁6″	To Order



RIVETS





- Patented, one-piece, tamper resistant anchor
- Formed with an "S" shaped configuration to create an expansion mechanism
- Use for base angles and door jamb base brackets

CONCRETE SPIKE





- A one-piece, heavy duty anchor for use in concrete, block or brick
- Features a finished hex head, integral washer, and a patented dual thread and chamfered tip
- Requires matched tolerance Wedge Bit
- Dip wedge bolt into lubricating oil prior to installation

SKU	Diameter	Length	Quantity
WBBT12250	1⁄2″	2 1⁄2"	To Order
WBBT12300	1/2"	3"	To Order
WBBT12400	1/2"	4"	To Order
WBBT12500	1/2"	5"	To Order
WBBT16500	5/8 "	5″	To Order

WEDGE BOLT PLUS

FRAME BOLT ASSEMBLIES



- The assembly has a flanged head and bolt, no washers needed
- Conforms to ASTM A307 specifications

FLANGED BOLT & NUT

SKU	Diameter	Length	Quantity	Head Size
PLCZ58114	5/8 "	1 1⁄4″	40	¹⁵ / ₁₆ " Hex

Office: (503) 630 - 7740 Fax: (503) 630 - 7770 www.metallionindustries.com





- Manufactured from premium quality organic mat and saturated with high-grade asphalt
- Approximate weight per roll is 50 lbs

30 LBS FELT (ASTM)

SKU	Width	Length	Coverage
F#30ASTM	3′	72′	200 sq ft



- Manufactured from premium quality organic mat and saturated with high-grade asphalt
- Approximate weight per roll is 28 lbs

30 LBS FELT (NON-ASTM)

SKU	Width	Length	Coverage
F#30	3′	72′	200 sq ft



- Hybrid technology combines asphaltic polymer & synthetic fabrics
- Slip-resistant
- Meets or exceeds ASTM D226 requirements
- Thermal stability in excess of 260 F
- Approximate weight per roll is 50 lbs

30 LBS SYNTHETIC (ASTM)

SKU	Width	Length	Coverage
SAFEG30	3.1′	145′	425 sq ft



- Peel & stick underlayment with 6 month exposure rating
- High temp rating, up to 240°F—30 year limited warranty
- Woven poly scrim, non-abrasive surface, with good walkability
- Approximate weight per roll is 50 lbs (40 mil nominal thickness)

ICE & WATER SHIELD

SKU	Width	Length	Coverage
ICE	3′	72′	200 sq ft

Office: (503) 630 - 7740 Fax: (503) 630 - 7770 www.metallionindustries.com

INSULATION



- Non-toxic, no fiberglass
- Seals tight around fasteners with certified ASTM testing
- Microcell polyethylene foam construction
- Improves energy efficiency
- Vapor barrier and thermal break all in one

SKU	Width	Length	Lap Туре	R-Value (varies by application)
ESPMICRO	4′	100′	Staple Flange	R-7 to R-10
ESPLOWE	4′	100′	EZ Seal Tape Flange	Up to R-11

- Fiberglass insulation bonded to white reinforced vinyl backing
- Insulates against the cold
- Eliminates condensation and drafts, reduces noise
- 6' x 100' rolls of 1.5" thick stocked
- Available in custom lengths (with lead time)

SKU	Width	Max Length	R-Value	Thickness
PVACCB1.5	4' or 6'	100′	R3-R4	1 ½"
INSWMPVRR10	4' or 6'	100′	R10	3"
INSWMPVRR13	4' or 6'	75′	R13	4"
INSWMPVRR19	4' or 6'	50′	R19	6"



FOIL INSULATION




CONDENSATION CONTROL BLANKET (WMP-VR)

VAPOR BARRIER

- Excellent choice as an in-wall and roof vapor retarder
- Heavy-duty scrim reinforcement, laminated between two layers of virgin high-strength polyethylene film
- Resists punctures and immediately stops tears
- Accordion folded and tightly rolled on a heavy-duty core for ease of handling and time-saving installation
- UV stabilizers increase longevity

SKU	Width	Length	R-Value	Thickness
VAP600	6′	100′	None	6 mil
VAP1200	12′	100′	None	6 mil



VAPOR BARRIER





- High tack, high adhesion, high shear strength
- Excellent low and elevated temperature performance
- TAPURGL bonds well in high moisture conditions

SKU	Width	Length	Thickness	Application
TAPUR	1 1⁄2"	180′	5 mil	Dry
TAPURGL	1 1⁄2"	180′	5 mil	Wet

DOUBLE SIDED TAPE



- Thin, strong, conformable, premium vinyl tape
- Particularly aggressive acrylic adhesive system
- Shrink and plasticizer resistant

SKU	Width	Length	Reinforced
TAVIN	3″	150′	No
TAWMPVR	3"	150′	Yes

VINYL TAPE



- Thin, strong, conformable, premium foil tape
- Particularly aggressive acrylic adhesive system
- Shrink and plasticizer resistant

FOIL TAPE

SKU	Width	Length	Reinforced
TAFOI	3″	150′	Yes

SEALANTS



- Excellent for sealing edges and seams on metal roofs
- Excellent flexibility over wide temperature ranges
- Long term durability

BUTYL CLAY

SKU	Thickness	Width	Length
BCL12	3/32"	1/2"	50′

33

SEALANTS



- Clear drying, polyether sealant
- Universal sealant good for all seasons
- Sticks to almost anything—Except for Kynar (PVDF) paint
- Apply in all weather, 100% solids will not shrink
- Paintable within 24 hours



SKU	Size
CLEAR	10.1 oz

- Sticks to wet surfaces—can be applied in the rain
- UV Resistant mildew & fungus resistant
- Elastomeric for a weatherproof long lasting seal
- Paintable in 24 hours with latex paint



SKU	Size	ELEVIDLE CEAL
FLEX	10.6 oz	FLEXIBLE SEAL

- Silicone sealant/adhesive available in translucent and select colors
- Remains permanently flexible and adheres well to damp surfaces
- ─ Extrudes down to −20° F
- Meets CARB and OTC Regulation (UOC Compliant)
- For both SMP and PVDF paint applications



SKU	Size	NOVA FLEV
NVF	10.3 oz	NOVA FLEX






- Great for residential or commercial heat vents and stove pipes
- Flexible base can be conformed to virtually any panel profile
- ── Withstands temperatures from −100° F up to 500° F
- Maximum resistance to UV rays and weathering
- Easy on-site customization

	·	Pipe Oute	r Diameter	Base Din	nensions
SKU	Size	Minimum	Maximum	Width	Length
MFHIT4	#4	3"	7"	10"	10"
MFHIT5	#5	4"	8"	11"	11"
MFHIT6	#6	5″	10"	12"	12"
MFHIT7	#7	6"	11"	14"	14"
MFHIT8	#8	7"	13"	17"	17"
MFHIT9	#9	10"	20"	25"	25"

SILICONE (HIGH TEMP)



- Flexible base can be conformed to virtually any panel profile
- Withstands temperatures up to 212° F
- Maximum resistance to UV rays and weathering
- Easy on-site customization special order a variety of colors



		Pipe Oute	r Diameter	Base Din	nensions
SKU	Size	Minimum	Maximum	Width	Length
MFBLK2	#2	1"	4"	6"	6"
MFBLK3	#3	1/4"	5"	8″	8"
MFBLK4	#4	3″	7"	10"	10"
MFBLK6	#6	5″	10"	12"	12"
MFBLK7	#7	6"	11"	14"	14"
MFBLK8	#8	7"	13"	17"	17"
MFBLK9	#9	10"	20"	25"	25"
MFBLK10	#10	12"	28"	34"	34"

EPDM

PIPE FLASHINGS



- Flexible base can be conformed to virtually any panel profile
- Withstands temperatures up to 212° F
- Maximum resistance to UV rays and weathering
- Easy on-site customization residential or commercial pipes
- Useful for electrical weather-heads or any location where over-the-top fitting is not an option

			Pipe Outer Diameter		Base Dimensions	
SKU	Size	Minimum	Maximum	Width	Length	
MFRET1	#1	1″	4"	8 1⁄4"	8 1⁄4"	



EPDM RETROFIT

VENTING

- A foam closure that allows venting, commonly used below ridge cap
- Made of extremely durable tear-, flame-, and clog-resistant polyester
- Flexible to fit almost any roof panel
- Factory applied glue strip
- 99% recovery after compression
- 40 year warranty & building code compliant

SKU	Profile	Thickness	Width	Length
RVMAG3	Delta Rib & Magna Rib	1"	2"	20′
RVPBR	PBR	1 ½"	2"	25′
RVL12	Loc Seam (12")	1"	2"	12"
RVL16	Loc Seam (16")	1"	2"	16"
RVCLIPLOC	Clip Loc	2"	2"	20′



RIDGE VENT



- A wire mesh screen excellent for venting a ridge
- Small enough mesh to keep birds and bugs out

SKU	Width	Length	
VENT8	8″	100′	

SCREEN VENT





- Will conform to almost any roof panel
- Compresses and fills every void
- Factory applied glue strip

UNIVERSAL SEAL

SKU	Thickness	Width	Length
US1125	1"	1 ½"	25′



- Made of ESMP foam
- Resists UV rays
- Blocks moisture/water and bugs

FORMED CLOSURE

	SKU		
Profile	Inside	Outside	Length
Corrugated	CLOSCOR		24"
Delta Rib (24")	IDELTA	DELTA	24"
Magna Rib	IMAGNA	MAGNA	36"
PBR	IPBR	PBR	36"
Loc Seam (12")	n/a	LOC12	36"
Loc Seam (16")	n/a	LOC16	32"





- ✓ Inserts into chuck of 14.4 volt or larger A/C or cordless drill
- Clamping device is standard with the Corrugated Metal TurboShear
- 24ga-30ga capacity in steel panels
- Long-life, dual ball bearings
- 360° rotating head secures in any position for optimum tool clearance and material flow
- Ideal for fast cutting in a wide variety of panel profiles
- ─ Malco® brand ─ Made in USA

TURBOSHEAR CM



TSCM TurboShear Corrugated Metal
TSCMRB Replacement Blade

- Aviation style steel metal snips
- ─ Malco® brand Made in Taiwan

AVIATION SNIPS



- SKU Application Length of Cut Grip Color

 AV6 Cuts Left 1.25" Red

 AV7 Cuts Right 1.25" Green
- Max 2000 series snips with non-slip, serrated jaws
- Hardened alloy steel blades offer maximum edge life
- Steel handle shaft extends through full length of grip
- Extra long life compression spring
- Ergonomic grip
- ─ Malco® brand Made in USA

SKU	Application	Length of Cut	Grip Color
M2001	Cuts Left	1.375"	Red
M2002	Cuts Right	1.375"	Green
M2003	Cuts Straight, Left & Right	1.687"	Yellow

PREMIUM AVIATION SNIPS

CUTTING TOOLS



- The serrated upper jaw offers solid gripping power with less burr
- Ground tips on jaws allow access in tight areas
- Has the ability to make nickel size blind hole cuts
- Offset cutting plane makes trim cuts both accessible and efficient
- Steel handle shaft extends through full length of grip
- Extra long life compression spring

SKU	Application	Length of Cut	Grip Color
M2006	Cuts Sharp Left Angles, Straight and 5" Circles	1.25"	Red
M2007	Cuts Sharp Right Angles, Straight and 5" Circles	1.25"	Green



Premium Offset Aviation Snips


- "Andy" aluminum handled 12" snip
- Snug, rounded handle loops that characterized the original
- Lightweight aluminum handle with a snug fit and feel
- Easily replaceable, high-carbon steel blades
- Malco® brand Made in USA

SKU	Length of Cut	Application	Tool Length	Weight
MC12N	3"	Cuts Straight, Left, Right and 6" Circles	12"	16.7 oz
ULC10	3"	Cuts Straight, Left, and Right	10"	9.5 oz



COMBINATION SNIPS

- Circular "Duckbill" forged steel snip
- Maneuvers and cuts easily to the very tip of the blade
- Cuts sheet metal, aluminum, steel siding and plastics
- Cuts thin materials without tearing or catching
- Malco® brand Made in USA






DUCKBILL STEEL SNIPS





- For clean, crisp bends in metal roofing materials
- Quickly adjusts for making bends in a variety of gauges and depths
- Exclusive 3-station roller design produces a uniform bend out to the very ends of a straight panel length
- Center roller station is also independently adjustable for making mildangled bends on a curve
- Hardened rollers assure long service life
- ─ Malco® brand Made in USA / Italy

3 STATION EDGE ROLLER





- Precise Vee-notched depth graduations on jaws are in ¼" increments
- Jaws are drop forged, high impact steel
- Hardened steel handles resist abuse
- Powerful compound leverage design
- Tool also features rust resistant nickel plating
- Non-slip vinyl grips with hand stops provide added comfort and resistance to elements
- Malco® brand Made in USA

			avv		
SKU	Item	Depth	Width	Tool Length	Weight
S3	3" Offset	1.25"	3.25"	8"	1.5 lbs
SG11	3" Offset	1.5"	3.375"	8 ¾"	2.9 lbs
S2R	3"	1.25"	3.25"	8 ¾"	1.5 lbs
S6R	6"	1.25"	6"	8 ¾"	1.875 lbs

HAND SEAMERS



- Makes uniform bends along the drip edge of standing seam panels
- High Leverage, Two Post Handle Design
- Rib-Reinforced Steel Plate Construction
- Malco® brand Made in USA

DRI	P ED	GE FO	LDIN	GTO	OL

SKU	Tool Length	Bending Seam	Bending Capacity
DEFT	24"	1" & 1 ½"	22 ga
DEFT1	18"	1" & 1 ½"	22 ga

Office: (503) 630 - 7740 Fax: (503) 630 - 7770 www.metallionindustries.com

FOLDING & CRIMPING TOOLS



- Hardened alloy steel blades offer maximum edge life
- Steel handle shaft extends through full length of grip
- Extra long life compression spring
- Ergonomic grip
- ─ Malco® brand Made in USA



SKU	Tool Length	Weight
C4	9"	1.23 lbs

DOWNSPOUT CRIMPER

CAULK GUNS

- Heavy-duty professional model with thumb activated pressure release
- Designed for use with a spouted cartridge
- Powerful ratcheting action minimizes worker fatigue or need to warm caulk up
- User can regulate stroke to fit hand; plus rod may be rotated
- Hand puncture wire folds inside handle
- ─ Malco® brand Made in Taiwan



SKU	Capacity	Carriage Diameter	Tool Length
CG20	1/10 gal	2"	14"

HEAVY DUTY CAULK GUN

- Lightweight, flexible caulking gun
- Flat design allows you to store in your tool box
- Large ladder-sized hanging hook
- Handy puncture wire stores along handle
- Malco® brand Made in Taiwan



SKU	Capacity	Carriage Diameter	Tool Length
CG12	1/10 gal	2"	13.4"

FLEXIBLE CAULK GUN





- Saws through metals quickly and accurately leaving clean, burr-free cuts behind
- Ideal for cutting steel studs, pipe, and sheets for most mild steels under ""
- Durable Triple Chip Grind (TCG) metal cutting tooth design maximizes cutting life and speed
- Laser cut stabilizer vents trap noise and vibration—keeping it cool
- Freud® brand Made in Italy

CIRCULAR SAW BLADES

SKU	Diameter	Teeth	Arbor
D0748F	7 ¼"	48	5/8 "



- One piece arbor and hole saw combination eliminates the need for separate arbor attachments
- 4/6 variable pitch teeth milled into high speed steel edge and microwelded body
- Shatterproof alloy steel body
- 1 %6" cutting depth
- ─ Malco® brand Made in USA

SKU	Size	
H11	¹¹ ⁄ ₁₆ "	
HSB	¼" Pilot Bit	

HOLE-IN-ONE SAW

- High speed steel cutting edge welded to a flexible high carbon steel back
 - Superior manufacturing process outperforms all others
 - Malco® brand Made in Switzerland

RECIPROCATING BLADES

SKU	Length	Application
3MC24	4"	Cuts sheet metal, pipe, and profiles up to 18 ga
4TF14	6"	Cuts all metals including stainless steel over $rac{1}{8}$ "

DRILL BITS



- Excellent for pre-drilling roof and wall panels
- Cutting tips on both ends
- 135° split point



SKU	Diameter	Length	Twist Length	Quantity
DE30	.128"	2"	1/2"	12

DOUBLE ENDED BIT

- Designed for use in a rotary hammer equipped with an SDS (slotted drive shaft) type chuck
- Can be used for drilling in concrete, block, brick, and soft stone



SKU	Diameter	Length
SDSP06100	1⁄4"	4"

1/4" x 4" SDS BIT

Designed for matched tolerance Wedge Bolt Plus

SKU	Diameter	Length
SDSPWB12150	1/2"	6"
SDSPWB12250	1/2"	10"
SDSPWB16200	5/8 "	8"



- A quick, easy method for drilling through mesh or rebar embedded in concrete
- Designed to fit a standard rotary drill with a ½" Jacobs style chuck

SKU	Diameter	Length
RBC1212	1/2"	12"
RBC5812	5/8 "	12"







- Double flute design assures penetration of soft and thin materials
- Drill holes without burring or deforming stock
- Perfect for use as a "hole-opening" reamer
- Completely resharpenable
- ── Malco® brand Made in Switzerland

STEP BIT

	Drilling			
SKU	Minimum	Maximum	Increments	
UB3	1⁄4"	3/4"	¹ ⁄16 "	

MEASURING TOOLS



- Double-riveted, powerful magnetic tip
- Abrasion-resistant nylon coating
- Rubber-clad housing

	Таре		
SKU	Width	Length	
T416M	1"	16′	
T425M	1"	25′	
T430M	1"	30′	

MAGNETIC TIP TAPE

SAFETY



- Hard-coated 100% polycarbonate
- Dual 9.75 base curvature viewing areas for wide unobstructed vision
- Lens blocks more than 99.9% of UV-A and UV-B light

CAE	ETY	$C \cup I$	N C C	EC
элг	15 11 11	GL	733	E 3

SKU	Style		
FORSGC	Clear		

Safety



- NRR 26 dB
- Corded, washable and reusable



ς	K	П
J	1,	v

FOR55991

REUSABLE EAR PLUGS

MISCELLANEOUS ITEMS

- Designed with painted screw heads in mind, reducing the risk of marring the paint
- Slightly oversized with rounded corners
- Also work great with unpainted screws

SKU	Size
ND1/4	1/4"
ND5/16	5/16"
ND3/8	3/8 "



MAGNETIC NUT DRIVERS

- Breathable polyester knit shell
- Unique texture latex coating provides secure grip
- Protects against cuts and abrasions
- No problem picking up nails and washers
- Available in M, L, and XL sizes



SKU

WGLOVE

WONDER GLOVES

- For use on all steel construction
- Acts as a second pair of hands
- Holds insulation in place
- GRAB STICK is strong enough to help hold metal panels in place



SKU

GRBSTK

MAGNETIC HOLDING TOOL





- Excellent for making a closed ridge
- Designed for use with our panel profiles, but may be used for many other applications
- Constructed of heavy gauge steel

SKU	Rib Spacing
CRIMPLOC12	12"
CRIMPLOC16	16"
CRIMPMAGNA	8" or 9"


CRIMP TOOLS



- Ideal for shearing to length and gable end cuts
- Adjustable angle cuts up to 4:12 pitch
- 24 gauge maximum panel thickness
- For use with our Magna Rib or PBR panel profiles

SKU	Profile
SHEARRENTM	Magna-Rib
SHEARRENTP	PBR

PORTABLE PANEL SHEARS





Office: (503) 630 - 7740

MECHANICAL SEAMERS

Fax: (503) 630 - 7770

		Gauge		Power		
SKU	Panel	Min	Max	Amps	Volts	Weight
SMRSSX	MI-150	24	26	7	120	35 lbs
SMRSSI	MI-200 / MI-210	22	24	11.5	110	89 lbs





- ▼ Virtually unbreakable light panels with 100% UV protection
- Retains optical clarity over time
- Custom lengths available (up to 20')
- ─ Will stay tough over a wide temperature range (-40°F to 210°F)
- 10-year limited warranty
- Soft White spreads light and greatly reduces harsh shadows and glare
- Follow installation directions

MAGNA RIB PROFILE

SKU	Profile	Color	Light Transmission
MPOLYC	Magna Rib	Clear	90%
MPOLY	Magna Rib	Soft White	85%



- ✓ Virtually unbreakable light panels with 100% UV protection
- Retains optical clarity over time
- Custom lengths available (up to 20')
- ─ Will stay tough over a wide temperature range (-40°F to 210°F)
- 10-year limited warranty
- Soft White spreads light and greatly reduces harsh shadows and glare
- Follow installation directions

PBR PROFILE

SKU	Profile	Color	Light Transmission
PPOLY	PBR	Clear	90%
PPOLYW	PBR	Soft White	85%

CUPOLAS



- All cupolas are pre-painted 29 gauge steel construction
- Available in over 100 standard colors
- All metal edges are hemmed
- No need to worry about red rust
- Roof and sides interlock for weather tight connection
- Shipped "knock-down", assembles at the job site
- Assembly instructions included
- Premium flashing kit raises the cupola an additional 3 ½" above the peak of the roof, and gives the sides a fuller look from the ground
- Optional weathervane available in a variety of styles

	Size		SKU		
Base Style	Length	Width	Louvers	Windows	
Standard	24"	24"	MWCUP24LS	MWCUP24WS	
Premium	24"	24"	MWCUP24LP	MWCUP24WP	
Universal	24"	24"	MWCUP24LUB	MWCUP24WUB	
Standard	36"	36"	MWCUP36LS	MWCUP36WS	
Premium	36"	36"	MWCUP36LP	MWCUP36WP	
Universal	36"	36"	MWCUP36LUB	MWCUP36WUB	
Standard	48"	48"	MWCUP48LS	MWCUP48WS	
Premium	48"	48"	MWCUP48LP	MWCUP48WP	
Universal	48"	48"	MWCUP48LUB	MWCUP48WUB	



CUPOLAS

WEATHERVANES

- Weathervanes come standard with black finish
- Please contact us for available styles

SKU	Size
WV24	24"
WV30	30"
WV46	46"



WEATHERVANES



		Included Components		
Ī	SKU	Quantity	Size	Description
	PSFD	1	24" x 28"	Stall Feed Door
		Additional Materials Required (Not Included)		
		None		

Stall Feed Door

	Included Components		
SKU	Quantity	Size	Description
	1	8′	Sidemount Track
	2		Wood Door Trolleys
	1		Sliding Bolt Latch
PSD	1		Small Adjustable Stay Roller
130	1		Non-Adjustable Door Stop
	2	8′	Plain Stall Rails
	2	44 ½"	Punched Stall Rails
	10	30"	Bars
	Additional Materials Required (Not Included)		
	14	2" x 6" x 4'	Tongue & Groove plus Fasteners

4' x 8' Sliding Door Kit

	Included Components		
SKU	Quantity	Size	Description
	2	10′	Punched Stall Rails
PSP10	30	30"	Bars
	2	8′	Plain Stall Rails
Additional Materials Require		Required (Not Included)	
	14	2" x 6" x 10'	Tongue & Groove plus Fasteners

10' Stall Partitions

	Included Components			
SKU	Quantity	Size	Description	
PSF5	2	5′-7″	Punched Stall Rails	
13.3	17	30"	Bars	
	Additional Materials Required (Not Included)			
	14	2" x 6" x 8'	Tongue & Groove	
	1	2" x 6" x 10'	Track Board and Fasteners	

5' - 7" Stall Front



AT A GLANCE


Stall systems and components are designed to meet the needs of horse owners by combining the strengths and flexibility required for safe and easy-to-assemble stall systems. All components are constructed of aluminum to resist rust, corrosion and abuse, and they exceed the industry's highest safety and manufacturing standards. Splintering due to cribbing and chewing is nonexistent because the wall and door edges are framed within an aluminum U-channel which leaves only the flat wood surfaces exposed. Each stall system comes complete with all the pre-fabricated parts and accessories required for quick and easy assembly.

	Included Components		
SKU	Quantity	Size	Description
	2	12′	Punched Stall Rails
PSP12	35	30"	Bars
	2	8′	Plain Stall Rails
	Additional Materials Required (Not Included)		
	14	2" x 6" x 12'	Tongue & Groove plus Fasteners

12' Stall Partitions

	Included Components		
SKU	Quantity	Size	Description
PSF7	2	7′-7″	Punched Stall Rails
1317	22	30"	Bars
	Additional Materials Required (Not Included)		
	14	2" x 6" x 10'	Tongue & Groove
	1	2" x 6" x 12'	Track Board and Fasteners

7' - 7" Stall Front

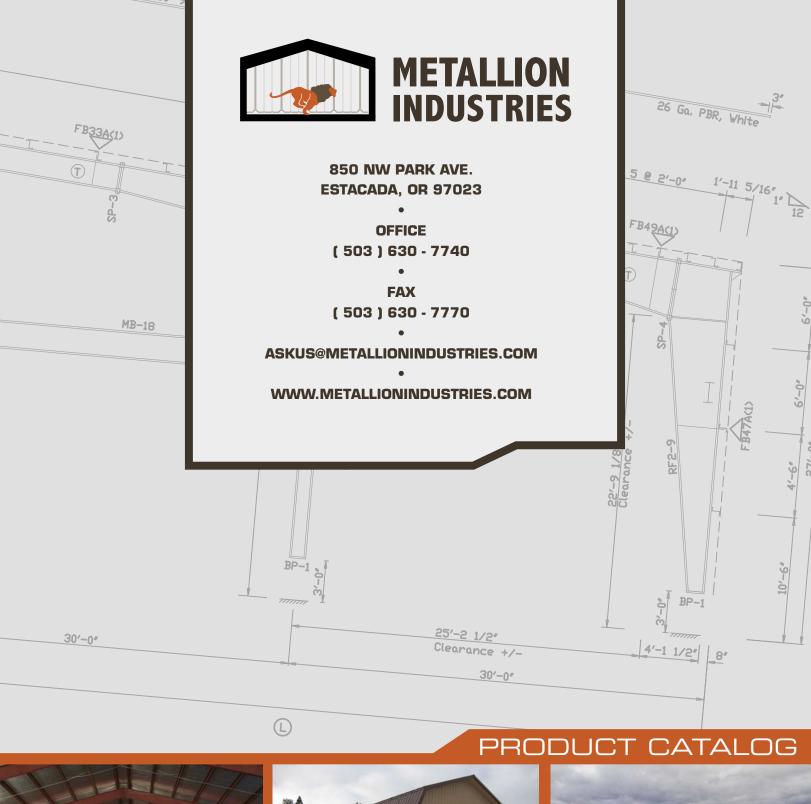







CUSTOM ENGINEERED STEEL BUILDINGS